



Configuration for Inline installation

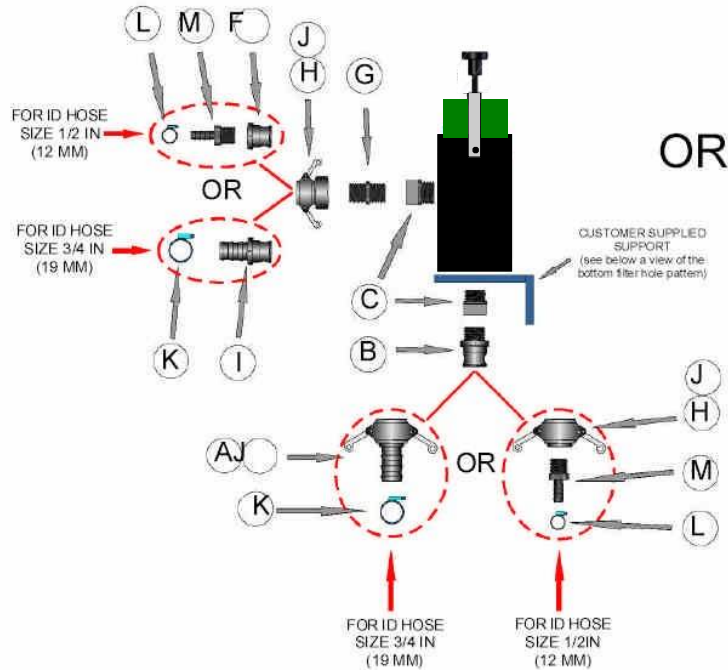

Configuration for pump installation

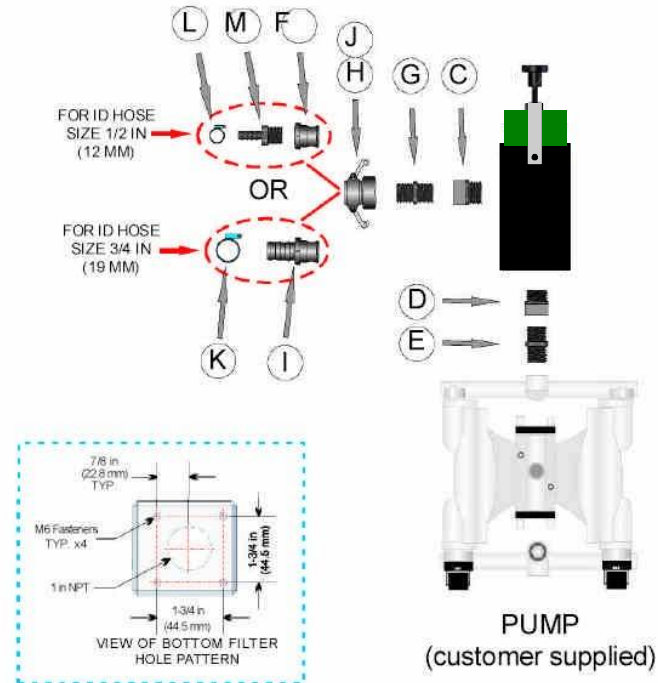

- A) Cam & Groove Hose Coupling ?C?: 3/4 Fem x 3/4" Barb SST (x1)
- B) Cam & Groove Hose Coupling ?F?: 3/4 Male x 3/4 NPT Male SST (x1)
- C) Reducer: 1" NPT Male x 3/4 NPT Fem SST (x2 or x1)
- D) Reducer: 1" NPT Male x ?? NPT Fem SST (x1) (Depends on Pump outlet port)
- E) Nipple: ?? NPT Male SST (x1) (Depends on Pump outlet port)
- F) Cam & Groove Hose Coupling ?A?: 3/4 Male x 3/4 NPT Fem SST (x1)
- G) Nipple: 3/4 NPT Male x 2-1/2" lg SST (x1)

- H) Cam & Groove Hose Coupling ?D?: 3/4 Fem x 3/4 NPT Fem SST (x2)
- I) Cam & Groove Hose Coupling ?E?: 3/4 male x 3/4" Barb SST (x1)
- J) Seal: 3/4" Teflon (x3) (Pre-mounted on the Cam & Groove Coupling)
- K) Hose Clamp for 3/4 in (19 mm) ID Hose SST (x2)
- L) Hose Clamp for 1/2 in (12 mm) ID Hose (x2)
- M) Coupling 3/4 NPT x 1/2 in (12 mm) ID Hose SST (x2)